


HA-010-F - Insert

121 010 021 0001

<https://www.wainelectric.com/ha-010-f>

WAIN

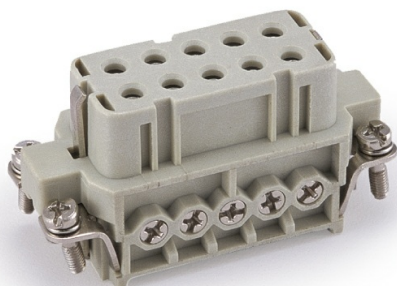

Connection type:Screw

connection, Male/female:Female, Specifications:10A, Number of connector contacts:10, Rated current:16A, Rated voltage:250V, Wire gauge (mm²):0.75-2.5mm², Wire gauge (AWG):18-14 AWG

Technical Data

Series	HA insert series
Connection type	Screw connection
Male/female	Female
Specifications	10A
Number of connector contacts	10
Grounding contacts	Yes
Rated current	16A
Rated voltage	250V
Rated pulse voltage	4KV
Class of pollution	3
Parameters when class of pollution is 2	10A 230/400V 4kV 2
Rated voltage as per UL/CSA	600V
Insulation resistance	$\geq 10^{10} \Omega$
Working temperature	-40°C...+125°C
Mating cycles	≥ 500
Inserts material	Polycarbonate
Inserts color	RAL 7032 (light gray)
Flame retardant rating as per UL94	V0
Contact material	Copper alloy
Surface treatment	Silver-plated
Contact resistance	$\leq 1 \text{ m}\Omega$
Wire gauge (mm ²)	0.75-2.5mm ²
Wire gauge (AWG)	18-14 AWG

HA-010-F - Insert

121 010 021 0001

<https://www.wainelectric.com/ha-010-f>



Tightening/testing torque	0.5Nm
Stripping length	NA
Standard	DIN EN 60 664 DIN EN 61984